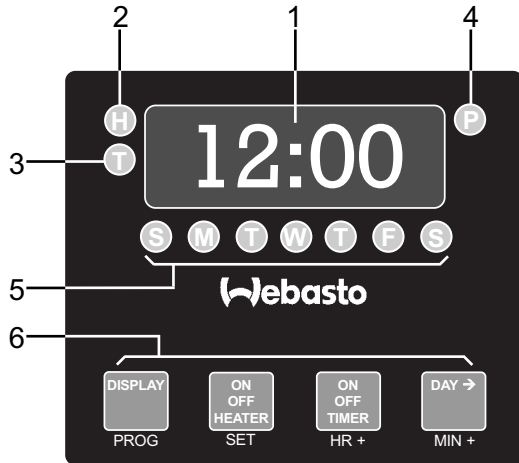


Operating Instructions for MCI 7-Day Electronic Timer



- 1 Time of day / preset time display.
- 2 Heater active indicator (green).
- 3 Timer active indicator (yellow).
- 4 Clock AM/PM indicator (red).
- 5 Day of the week indicators (red).
- 6 Function / setting buttons.



General


The 7-Day Electronic Timer provides full control of heater operation in either manual or timed modes.


The timer allows for 1 preset start time setting once within a 24 hour period on any 1 day up to 7 days in advance.


The current time and weekday must be programmed.


Clock Programming


Press and hold button 'PROG', depress 'MIN +' briefly and release both buttons simultaneously to activate programming mode. Day indicator (5) will flash.  

Press button 'DAY ->' to select day of week. 



Press button 'SET' to activate time setting mode. 


Press button 'HR +' to select correct hour. 


Press button 'MIN +' to select correct minute. 



Press button 'SET' to end clock programming mode. If 'SET' button is not depressed within 15 seconds, programming function will end automatically. 


Timer Programming

Press and hold button 'PROG', depress 'HR +' briefly and release both buttons simultaneously to activate programming mode. The yellow timer indicator (3) will flash.  


Press button 'DAY ->' to select desired day of week. 

Press button 'SET' to activate time setting mode. 


Press button 'HR +' or 'MIN +' to select heater start time. If the dip switch setting is in the AM/PM mode, the red PM  

Press button 'SET' to end timer programming mode. If 'SET' button is not depressed within 15 seconds, programming function will end automatically. 

Manual Operation

To manually switch the heater on, press the 'ON OFF HEATER' button. The green heater 'active' indicator (2) will respond. Press button a second time to turn the heater off. 

Timed Operation

Press the 'ON OFF TIMER' button to activate or deactivate the timed start of heater mode. Whenever the 'ON OFF TIMER' button is pressed, the current timer setting will be visible on the display for a few seconds. When the timer mode is active, the yellow timer indicator (3) will respond. The heater will automatically switch on upon reaching the programmed start time. 

Timer Duration

With the ignition off, and the heater is switched on manually or automatically, it will stay on for a duration of 1 hour or until the 'ON OFF HEATER' button is pressed.

With the ignition on (bus in operation), the heater will run and cycle continuously until the ignition key is turned off.

Display Stand By Mode

The timer display will be visible whenever the ignition is on or any of the timer function buttons (6) are pressed.

If the ignition is off, the display will be visible for 30 seconds.



North American Headquarters
 3333 John Conley Drive
 Lapeer, MI 48446

Technical Assistance: 1-800-667-8900